



#### SAW FILTER

Part Number: VTF433N

The VTF433N is a low-loss, compact, and economical surface-acoustic-wave (SAW) filter in a low-profile metal F-11 case designed to provide front-end selectivity in 433.920 MHz receivers. Receiver designs using this filter include superhet with 10.7 MHz or 500 kHz IF, direct conversion and superregen.

### 1. Package Dimension (F-11)





Pin	Configuration				
1	Input / Output				
4	Output / Input				
2/3	Case Ground				


Dimensions	Data (unit: mm)			
А	11.0±0.3			
В	4.5±0.3			
С	3.2±0.3			
D	0.45±0.1			
E	5.0±0.5			
F	2.54±0.2			

## 2. Marking


# **VTF433N**

Color: Black or Blue

#### 3. Test Circuit



## 4. Typical Frequency Response

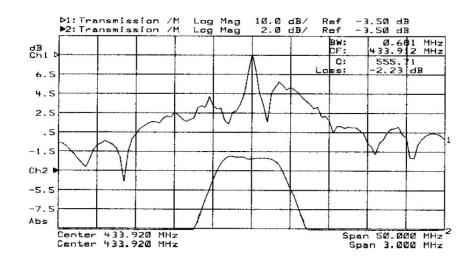



#### 5. Performance

## 5-1. Maximum Rating

Rating	Value	Unit	
CW RF Power Dissipation		10	dBm
DC Voltage Between Any Two Pins	$V_{ m DC}$	±30	V
Storage Temperature Range	$T_{ m stg}$	-40 to +85	$^{\circ}$
Operating Temperature Range	T <sub>A</sub>	-10 to +60	$^{\circ}$

#### 5-2. Electronic Characteristics

Characteristic		Minimum	Typical	Maximum	Unit	
Center Frequency (center frequency between 3dB points)		f <sub>C</sub>		433.920		MHz
Insertion Loss		IL	-	3.0	4.5	dB
3dB Bandwidth		BW <sub>3</sub>		600	800	kHz
Rejection	at f <sub>C</sub> -21.4MHz (Image)		40	50		dB
	at f <sub>C</sub> -10.7MHz (LO)		20	30		
	Ultimate		-	60		
Temperature	Turnover Temperature	To	25		55	°C
	Turnover Frequency	f <sub>O</sub>		f <sub>C</sub>		MHz
	Frequency Temperature Coefficient	FTC		0.032		ppm/°C²
Frequency Aging Absolute Value during the First Year		fA		10		ppm/yr

(i) CAUTION: Electrostatic Sensitive Device. Observe precautions for handling!

- 1. The frequency  $f_{\mathbb{C}}$  is defined as the midpoint between the 3dB frequencies.
- Unless noted otherwise, all measurements are made with the filter installed in the specified test fixture that is connected to a 50Ω test system with VSWR≤1.2:1. The test fixture L and C are adjusted for minimum insertion loss at the filter center frequency, f<sub>C</sub>. Note that insertion loss, bandwidth, and passband shape are dependent on the impedance matching component values and quality.
- 3. Unless noted otherwise, specifications apply over the entire specified operating temperature range.
- Frequency aging is the change in f<sub>C</sub> with time and is specified at +65°C or less. Aging may exceed the specification for prolonged temperatures above +65°C. Typically, aging is greatest the first year after manufacture, decreasing in subsequent years.
- 5. Turnover temperature,  $T_0$ , is the temperature of maximum (or turnover) frequency,  $f_0$ . The nominal frequency at any case temperature,  $T_0$ , may be calculated from:  $f = f_0 [1 FTC (T_0 T_0)^2]$ .
- The specifications of this device are based on the test circuit shown above and subject to change or obsolescence without notice.
- All equipment designs utilizing this product must be approved by the appropriate government agency prior to manufacture or sale.
- 8. Our liability is only assumed for the Surface Acoustic Wave (SAW) component(s) per se, not for applications, processes and circuits implemented within components or assemblies.
- 9. For questions on technology, prices and delivery, please contact our sales offices or e-mail info@vtorch.ca