



#### SAW FILTER Part Number : VTF859M

The VTF859M is a low-loss, compact, and economical surface-acoustic-wave (SAW) filter in a low-profile metal F-11 case designed to provide front-end selectivity in 859.150 MHz receivers. Receiver designs using this filter include superhet with 10.7 MHz or 500 kHz IF, direct conversion and superregen.

#### 1. Package Dimension (F-11)





 Dimensions

 A

 B

Pin

1

4

2/3

В	4.5±0.3				
С	3.2±0.3				
D	0.45±0.1				
E	5.0±0.5				
F	2.54±0.2				

Configuration Input / Output


Output / Input

Case Ground

Data (unit: mm)

11.0±0.3

# 3. Test Circuit

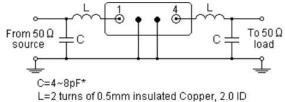


**VTF859M** 

2. Marking

Color: Black or Blue

## 4. Typical Frequency Response

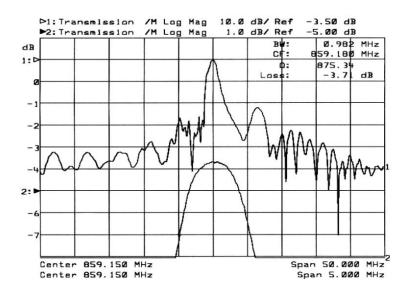

info@vtorch.ca



## 5. Performance

5-1. Maximum Rating

Rating	Value	Unit	
CW RF Power Dissipation	Р	10	dBm
DC Voltage Between Any Two Pins	V <sub>DC</sub>	±30	V
Storage Temperature Range	$T_{stg}$	-40 to +85	°C
Operating Temperature Range	T <sub>A</sub>	-10 to +60	°C

## 5-2. Electronic Characteristics

Characteristic			Minimum	Typical	Maximum	Unit
Center Frequency (center frequency between 3dB points)		f <sub>C</sub>		859.150		MHz
Insertion Loss		IL		4.0	5.5	dB
3dB Pass band	1	BW <sub>3</sub>		1.0		MHz
Rejection	at f <sub>C</sub> -21.4MHz (Image)		40	50	( <del>-13</del> )	dB
	at f <sub>C</sub> -10.7MHz (LO)	50 J	25	40		
	Ultimate			60	5 <b></b> 5	
Temperature	Turnover Temperature	To	25		55	°C
	Turnover Frequency	f <sub>O</sub>		f <sub>C</sub>		MHz
	Frequency Temperature Coefficient	FTC		0.032		ppm/℃ <sup>2</sup>
Frequency Aging Absolute Value during the First Year		fA		10		ppm/yr

**(i)**CAUTION: Electrostatic Sensitive Device. Observe precautions for handling!

- The frequency f<sub>c</sub> is defined as the midpoint between the 3dB frequencies.
   Unless noted otherwise, all measurements are made with the filter installed in the specified test fixture that is connected to a 50Ω test system with VSWR≤1.2:1. The test fixture L and C are adjusted for minimum insertion loss at the filter center frequency, fc. Note that insertion loss, bandwidth, and passband shape are dependent on the impedance matching component values and quality.
- 3. Unless noted otherwise, specifications apply over the entire specified operating temperature range.
- Frequency aging is the change in f<sub>C</sub> with time and is specified at +65°C or less. Aging may exceed the specification for prolonged temperatures above +65°C. Typically, aging is greatest the first year after manufacture, decreasing in subsequent years.
- 5. Turnover temperature, T<sub>0</sub>, is the temperature of maximum (or turnover) frequency, f<sub>0</sub>. The nominal frequency at any case temperature,  $T_c$ , may be calculated from:  $f = f_0 [1 - FTC (T_0 - T_c)^2]$ .
- The specifications of this device are based on the test circuit shown above and subject to change or 6. obsolescence without notice.
- 7. All equipment designs utilizing this product must be approved by the appropriate government agency prior to manufacture or sale.
- 8. Our liability is only assumed for the Surface Acoustic Wave (SAW) component(s) per se, not for applications, processes and circuits implemented within components or assemblies.
- 9. For questions on technology, prices and delivery, please contact our sales offices or e-mail info@vtorch.ca