


SAW FILTER

Part Number : VTF433B

The VTF433B is a low-loss, compact, and economical surface-acoustic-wave (SAW) filter in a low-profile metal TO-39 case designed to provide front-end selectivity in 433.920 MHz receivers. Receiver designs using this filter include superhet with 10.7 MHz or 500 kHz IF, direct conversion and superregen.

1. Package Dimension (TO-39)

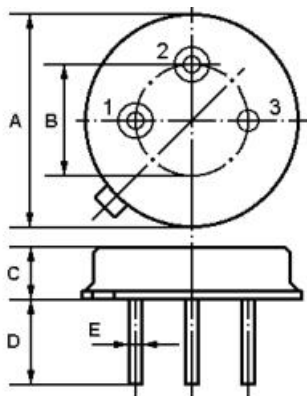


Pin	Configuration
1	Input / Output
2	Output / Input
3	Case Ground

Dimension	Data (unit: mm)
A	9.15±0.20
B	5.08±0.20
C	3.30±0.20
D	3±0.20 / 5±0.20
E	0.45±0.10

2. Marking


**VTF
433B**

3. Test Circuit

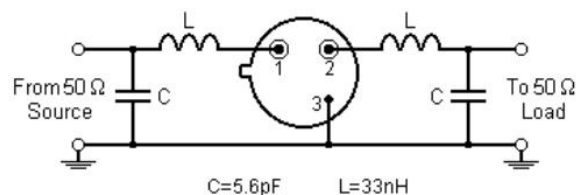

Color: Black or Blue

4. Typical Frequency Response

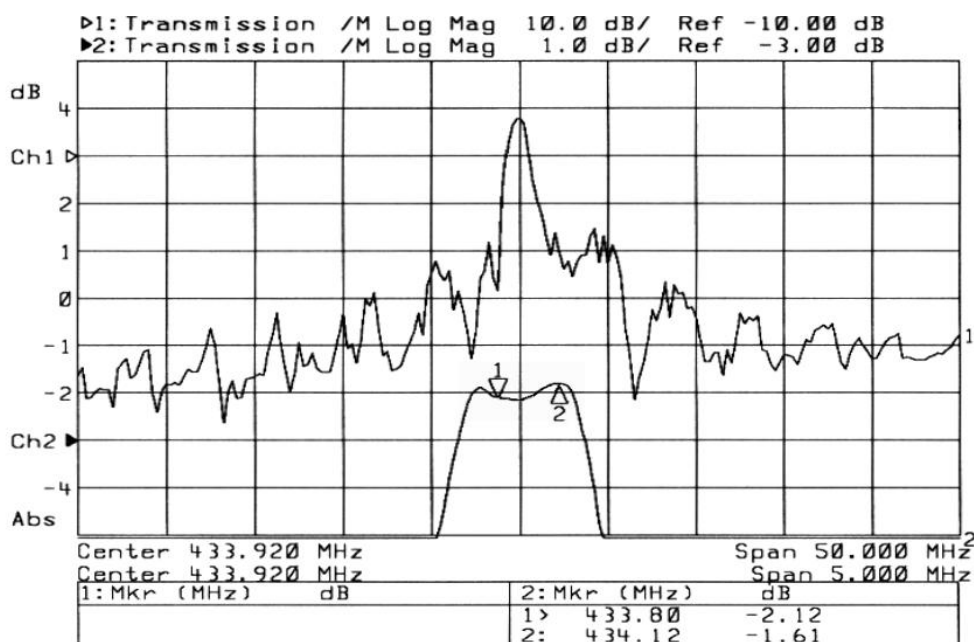

5. Performance

5-1. Maximum Rating

Rating		Value	Unit
Input Power Level	P_{in}	10	dBm
DC Voltage	V_{DC}	0	V
Storage Temperature Range	T_{stg}	-45 to +120	°C
Operating Temperature Range	T_A	-45 to +120	°C

5-2. Electronic Characteristics

Reference temperature: $T_A = -45 \dots +95 \text{ } ^\circ \text{C}$

Characteristic		Minimum	Typical	Maximum	Unit
Center Frequency (center frequency between 3dB points)	f_c		433.920		MHz
Insertion Loss 433.80 434.12 MHz	IL	--	2.0	4.0	dB
3dB Pass bandwidth (relative to IL)	BW_3	670	730	790	kHz
Pass band (relative to IL) 433.76 434.08 MHz 433.74 434.10 MHz 433.68 434.16 MHz	α_{BW}	-- -- --	1.0 1.0 1.5	2.0 3.0 6.0	dB dB dB
Relative attenuation (relative to IL) 10.00 414.00 MHz 414.00 428.00 MHz 428.00 432.84 MHz 434.92 442.00 MHz 442.00 550.00 MHz 550.00....1000.00 MHz	α_{rel}	45 35 15 10 35 45	50 40 20 15 40 50	-- -- -- -- -- --	dB dB dB dB dB dB

ⓘ CAUTION: Electrostatic Sensitive Device. Observe precautions for handling!

1. The frequency f_c is defined as the midpoint between the 3dB frequencies.
2. Unless noted otherwise, all measurements are made with the filter installed in the specified test fixture that is connected to a 50Ω test system with VSWR≤1.2:1. The test fixture L and C are adjusted for minimum insertion loss at the filter center frequency, f_c . Note that insertion loss, bandwidth, and passband shape are dependent on the impedance matching component values and quality.
3. Unless noted otherwise, specifications apply over the entire specified operating temperature range.
4. Frequency aging is the change in f_c with time and is specified at +65°C or less. Aging may exceed the specification for prolonged temperatures above +65°C. Typically, aging is greatest the first year after manufacture, decreasing in subsequent years.
5. Turnover temperature, T_0 , is the temperature of maximum (or turnover) frequency, f_0 . The nominal frequency at any case temperature, T_C , may be calculated from: $f = f_0 [1 - FTC (T_0 - T_C)^2]$.
6. The specifications of this device are based on the test circuit shown above and subject to change or obsolescence without notice.
7. All equipment designs utilizing this product must be approved by the appropriate government agency prior to manufacture or sale.
8. Our liability is only assumed for the Surface Acoustic Wave (SAW) component(s) per se, not for applications, processes and circuits implemented within components or assemblies.
9. For questions on technology, prices and delivery, please contact our sales offices or e-mail info@vtorch.ca