

Fiberglass Omni Antenna

VT2.4G-FOA-9




Applications

- 2.4 GHz Wireless LAN
- 2.4GHz ISM Band
- Public Wireless Hotspot
- Multipoint Applications

Features

- Superior performance
- High Gain, Low VSWR
- Light weight fiberglass radome
- All weather operation
- Heavy-duty steel mounting brackets

1.Installation Sketch

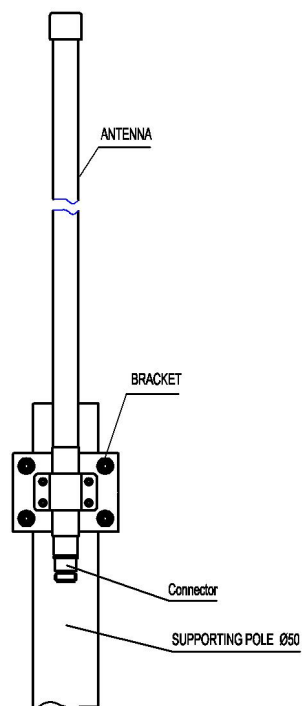

2.Electrical Characteristics

Form 1

No.	Item	Specifications
1	Frequency Range-MHz	2400-2483MHZ
2	Beamwidth-MHZ	83
3	Polarization	Vertical
4	Gain-dBi	12
5	Vertical Beamwidth-°	7
6	VSWR	≤1.5
7	Impedance	50 Ω
8	Max power	100w

3.Mechanical Characteristics

Form 2

No.	Item	Specification
1	Connector Type	N-Female
2	Dimension-mm	1.2
3	Weight-Kg	0.8±0.2
4	Mast Diameter-mm	φ 40~50mm