


# ROHS

SIGN	DATE	DESCRIPTION	APPROVER
▲			
▲			
▲			

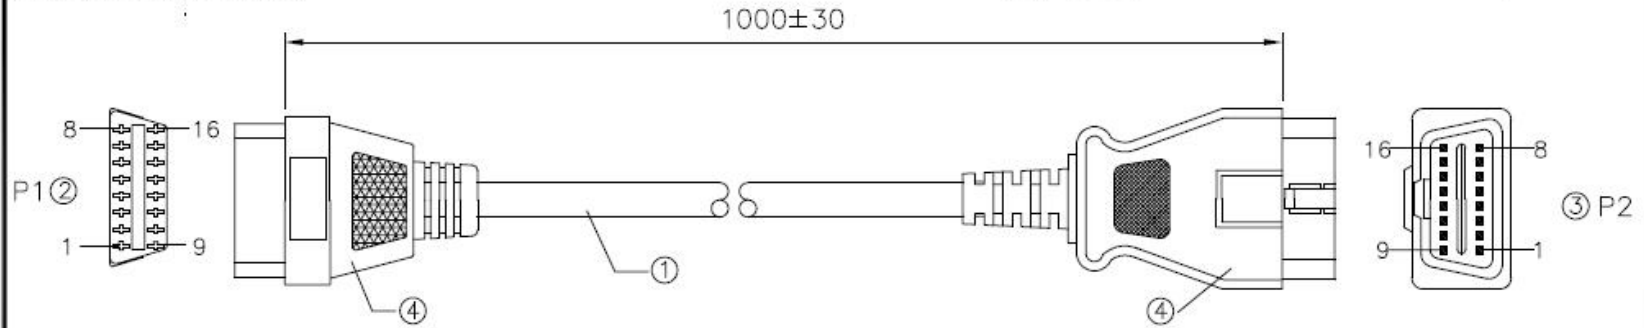


### PIN ASSIGNMENT

P1	COLOR	P2	P1	P2
1	BLACK	1	9	GREY
2	BROWN	2	10	WHITE
3	RED	3	11	PINK
4	ORANGE	4	12	BROWN/WHITE
5	YELLOW	5	13	BLACK/WHITE
6	GREEN	6	14	RED/WHITE
7	BLUE	7	15	LIGHT GREEN
8	PURPLE	8	16	DRAIN

### ELECTRONIC TEST:

1. Voltage:DC 300V 10M ohm/10 ms.
2. Contact resistance: 3.0 ohm MAX.
3. 100% Open,Short,Mis-Wire Testing.



## V. TORCH

DRG No: <b>SCR-001</b>		UNIT:MM
APPROVED BY	CHECKED BY	DESIGNED BY
Zuo Fei 2014/11/28	An li Hua 2014/11/28	Cai Chuang 2014/11/28

ITEM	DESCRIPTON	Q'TY	REMARK
4	PVC: BLACK OVERMOLD,50P	50G	
3	CONN:ODB-II 16P MALE,BLACK INSULATION,NICKEL PLATED:REV:U	1PCS	
2	CONN: OBD-II FEMALE,BLACK INSULATION,NICKEL PLATED	1PCS	
1	UL2464 24AWG*16C+AL/MY,C.D=7.0MM,BALCK JACKET	1PCS	