


ROHS

SIGN	DATE	DESCRIPTION	APPROVER
△			
△			
△			

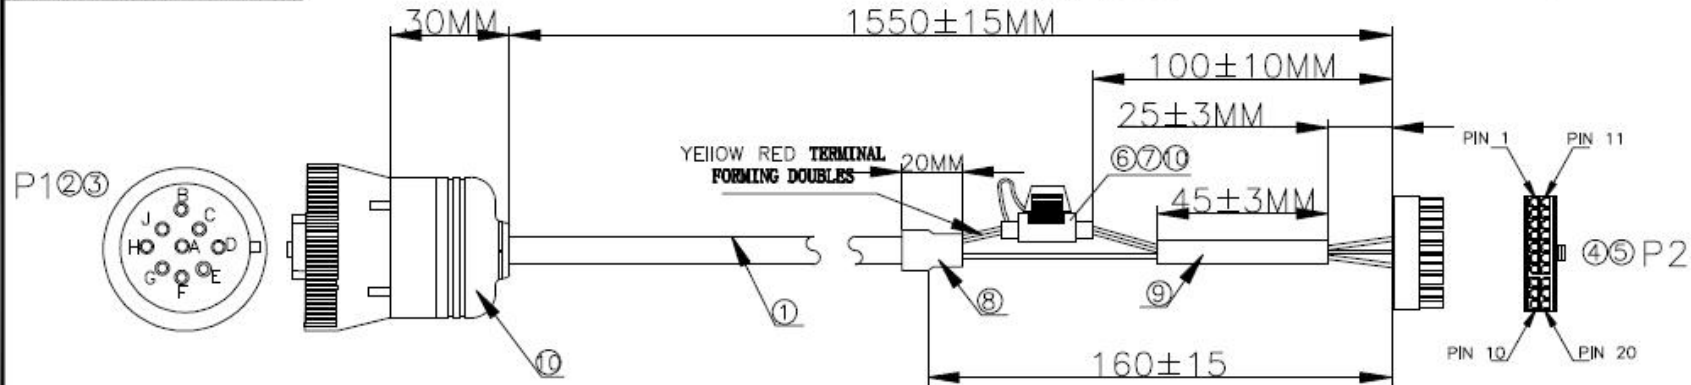

COLOR

(BLACK SHELL + BODY + RED RUBBER RING)

P1		P2
A	BLACK	15
B	(Fused) YELLOW	8
	RED	14

ELECTRONIC TEST:

1. Voltage:DC 300V 5M ohm/10 ms.
2. Contact resistance: 3 ohm MAX.
3. 100% Open,Short,Mis-Wire Testing.

ITEM	DESCRIPTION	Q'TY
10	PVC: BLACK, HARDNESS: 45P.	KG
9	BLACK CASING: HEAT SHRINKABLE TUBE L=45MM ID= 4.0MM	1 PCS
8	BLACK CASING: HEAT SHRINKABLE TUBE L=20MM ID=5.0MM	1PCS
7	FUSE: 3A 32V FUSE PURPLE	1PCS
6	TERMINAL: 110 FLAG TERMINAL	2PCS
5	TERMINAL: MOLEX3.0 FEMALE TERMINAL	3PCS
4	HOUSING:MOLEX3.0 2*10P BLACK-MALE HOUSING	1PCS
3	TERMINAL: J1939 9P FEMALE TERMINAL	9PCS
2	HOUSING: J1939 9P MALE (BLACK SHELL + BODY + RED RUBBER RING)	1SET
1	CABLE UL2464 22AWG 3C+AL,OD= 4.0MM, BLACK JACKEL	1590MM

V. TORCH

DRG No: C102-IC-3		
APPROVED BY	CHECKED BY	DESIGNED BY
Zuo Fei 2015/04/30	An Li Hua 2015/04/30	Cai Chuang 2015/04/30