

Circular Polarization Wall Mount Antenna

VTRFID-CPWMA-1




Applications

- CDMA800/GSM900/RFID
- 860 to 960MHz band communications system
- Indoor coverage
- Others applications

Features

- Broad band, coverage 860 to 960MHz common system
- Light weight, Small size
- UV stable ABS antenna radome
- N female connector with a pigtail
- Wall mount

1.Installation Sketch

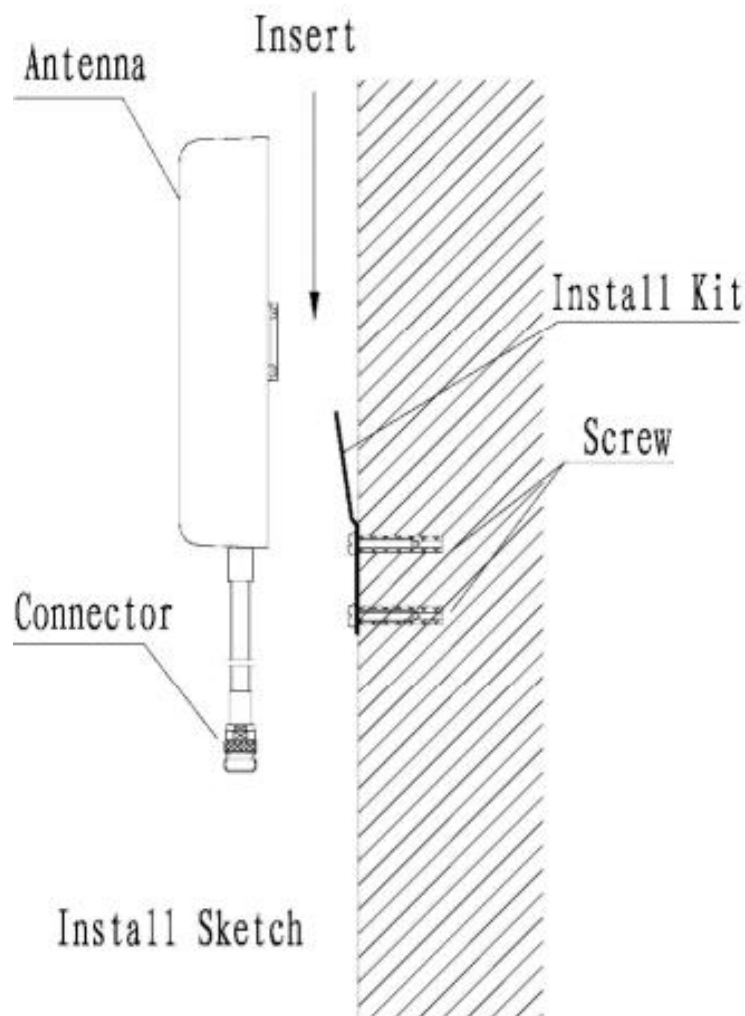

2. Electrical Characteristic

No.	Item	Specifications
1	Frequency Range-MHz	860-960MHZ
2	Gain-dBi	7
3	Beamwidth-°	E:60 H:60
4	VSWR	≤1.5
5	Impedance	50 Ω
6	Polarization	RHCP
7	Max power	50W

3. Mechanical

No.	Item	Specification
1	Cable	
2	Connector	N female or customized
3	Size	210*180*44mm
4	Weight-Kg	0.6
5	Radome material	UV stable ABS
6	Radome color	White
7	Mounting	Mast