


ROHS

SIGN	DATE	DESCRIPTION	APPROVER
▲			
▲			
▲			

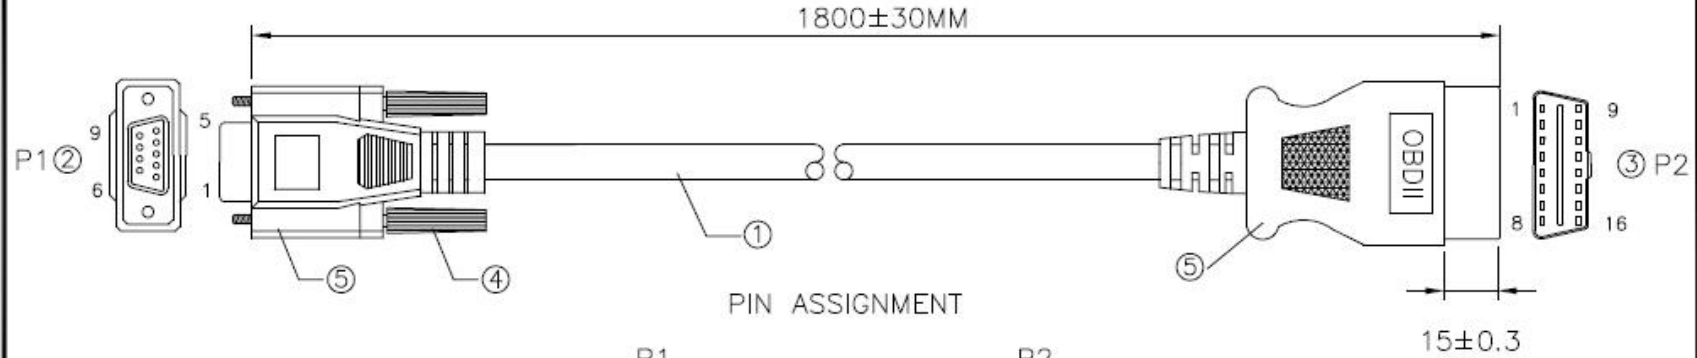


PIN ASSIGNMENT

P1		P2
7	_____	2
2	_____	4
3	_____	6
4	_____	7
6	_____	10
5	_____	12
1	_____	14
8	_____	15
9	_____	16

ELECTRONIC TEST:

1. Voltage:DC 300V 20M ohm/10 ms.
2. Contact resistance: 2.0 ohm MAX.
3. 100% Open,Short,Mis-Wire Testing.



V. TORCH

DRG No: SCR-002		UNIT:MM
APPROVED BY	CHECKED BY	DESIGNED BY
Zuo Fei 2014/11/28	An li Hua 2014/11/28	Cai Chuang 2014/11/28

ITEM	DESCRIPTION	QTY	REMARK
5	PVC: BLACK OVERMOLD,45P	35G	
4	THUMBSCREWS; 4-40UNC,L=33.5MM,BLACK MOLDED	2PCS	
3	CONN:ODB-II 16P MALE,BLACK INSULATION REV:USA(12V)	1PCS	
2	CONN: D-SUB 9P FEMALE,BLACK INSULATION	1PCS	
1	CABLE:UL2464 22WAG*9C+AL.OD=8.0MM BLAKC JACKET	1PCS	