


# ROHS

| SIGN | DATE | DESCRIPTION | APPROVER |
|------|------|-------------|----------|
| △    |      |             |          |
| △    |      |             |          |
| △    |      |             |          |

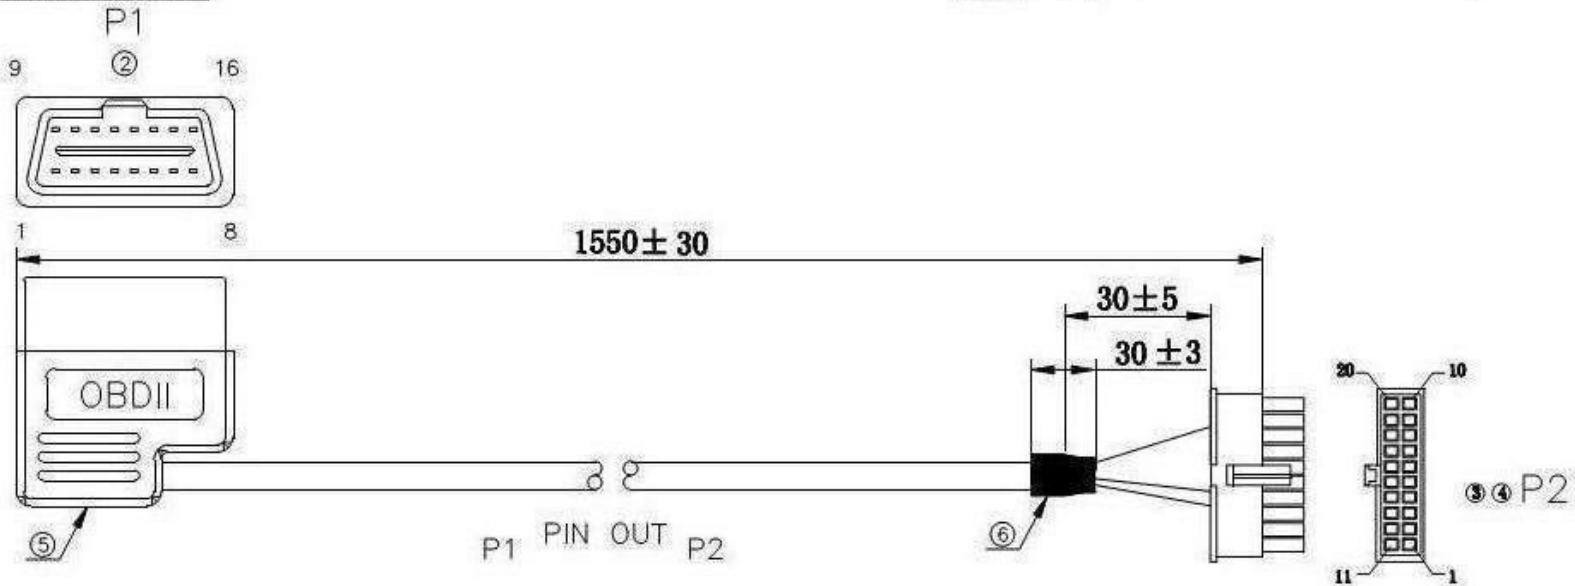


4 BLACK 15  
 16 YELLOW 8  
 RED 14

### ELECTRONIC TEST:

1. Voltage:DC 300V 5M ohm/10 ms.
2. Contact resistance: 3.0 ohm MAX.
3. 100% Open,Short,Mis-Wire Testing.

UNIT:mm



## V. TORCH

DRG No: C102-IC-2

| APPROVED BY          | CHECKED BY             | DESIGNED BY             |
|----------------------|------------------------|-------------------------|
| Zuo Fei<br>2014/4/12 | An li hua<br>2014/4/12 | Cai Chuang<br>2014/4/12 |

| 6    | casings: $\phi 7.0 \times L=30MM$ BLACK                   | 1PCS |        |
|------|---|------|--------|
| 5    | OVERMOLD:50P PVC, COLOR:BLACK                             | 25G  |        |
| 4    | TERMINAL:MOLEX3.0MM-PT                                    | 3PCS |        |
| 3    | HOUSING:MOLEX3.0MM, 2*10PIN HSG- BLACK INSUTIONLA         | 1PCS |        |
| 2    | CONN:OBDII MALE, PINS NICKEL, BLACK INSUTIONLA REV:USA    | 1PCS |        |
| 1    | CABLE: UL2464 22AWG*3C+AL, OD=4.0MM, PVC BALCK INSUTIONLA | 1PCS | 1550MM |
| ITEM | DESCRIPTION   | Q'TY | REMARK |