



ROHS

SIGN	DATE	DESCRIPTION	APPROVER
△			
△			

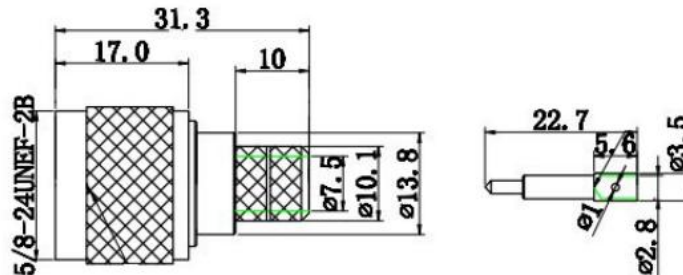

TECHNICAL CHARACTERISTICS

Temp. range	-65~+165° C (PE Cable)
Vibration	MIL-STD-202, Method 213
Impedance	50 Ω
Frequency Range	DC~11GHz
Working Voltage	1000V max
Withstand Voltage	2500V rms
Contact resistance	
Center Contact	≤ 1 mΩ
Outer Contact	≤ 1 mΩ Insulation
resistance	≥ 5000 MΩ
VSWR Straight	≤ 1.15
Right angle	≤ 1.25
Durability(mating)	≥500 (cycles)



V. TORCH

DRG No: VT-N1-02

APPROVED BY	CHECKED BY	DESIGNED BY
Zuo Fei 2012/06/18	An li hua 2012/06/18	Cai Chuang 2012/06/18

4	insulator	PTFE White	PCS	1	ROHS
3	pressure pinpe	brass nickel plating	PCS	1	ROHS
2	pin	brass gold plating	PCS	1	ROHS
1	Body	brass nickel plating	PCS	1	ROHS
NO.	Part Number	Description	UNIT	Q'TY	