


SAW FILTER

Part Number : VTF34506

The VTF34506 is a low-loss, compact, and economical surface-acoustic-wave (SAW) RF filter in a surface-mount ceramic QCC8B case for remote control receivers.

1. Package Dimension (QCC8B)




Pin	Configuration			
2	Input			
1, 3	Input Ground			
6	Output			
5, 7	Output Ground			
4, 8	to be grounded			

Sign Data (unit: mm)		Sign	Data (unit: mm)		
А	1.00	D	1.50		
в	1.27	E	3.80		
C 0.60		F	3.80		


3. Test Circuit





No matching network required for operation at 50Ω

4. Typical Frequency Response

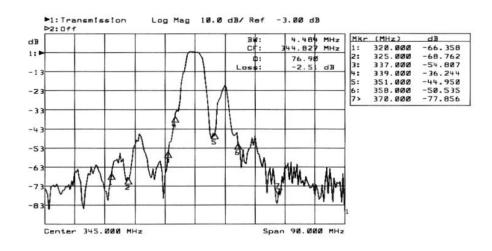

info@vtorch.ca

VTF

2. Marking

34506

Laser Marking



5. Performance

5-1. Maximum Ratings

Rating		Value	Unit	
Source Power	Рs	0	dBm	
DC Voltage	V _{DC}	0	V	
Storage Temperature Range	$T_{ m stg}$	-40 to +85	°C	
Operating Temperature Range	TA	-10 to +60	°C	

5-2. Electronic Characteristics

Reference Temperature: $T A = 25^{\circ}C$

Terminating Impedance: $ZS = 50\Omega$, $ZL = 50\Omega$

Characteristic		Min.	Тур.	Max.	Unit
Center Frequency	fc		345.00		MHz
Insertion Loss	IL				
344.60 345.40 MHz			2.5	4.0	dB
Amplitude Ripple (p-p)	Δα				
344.60 345.40 MHz	1000000	575.6	0.5	1.5	dB
Relative Attenuation (relative to IL)	arel				
10.00 320.00 MHz		48	53		dB
320.00 325.00 MHz		41	47		dB
325.00 337.00 MHz		32	39		dB
337.00 339.00 MHz		26	31		dB
351.00 358.00 MHz		13	16		dB
358.00 370.00 MHz		35	39		dB
370.00 700.00 MHz		47	52		dB
700.00 1000.0 MHz		40	45		dB
Input / Output Impedance		50Ω			

(i) CAUTION: Electrostatic Sensitive Device. Observe precautions for handling!

1. The frequency f C is defined as the midpoint between the 3dB frequencies.

2. Unless noted otherwise, all measurements are made with the filter installed in the specified test fixture that is connected to a 50 Ω test system with VSWR \leq 1.2:1.

3. Unless noted otherwise, specifications apply over the entire specified operating temperature range.

4. The specifications of this device are based on the test circuit shown above and subject to change or obsolescence

without notice.

5. All equipment designs utilizing this product must be approved by the appropriate government agency prior to manufacture or sale.

6. Our liability is only assumed for the Surface Acoustic Wave (SAW) component(s) per se, not for applications, processes and circuits implemented within components or assemblies.

For questions on technology, prices and delivery, please contact our sales offices or e-mail info@vtorch.ca